



dimmable!

OSRAM ECOPACK® -FH DIM

SEE THE WORLD IN A NEW LIGHT

**OSRAM**





## Infinitely dimmable T5 batten luminaire

OSRAM ECOPACK®-FH DIM, the new electronic T5 batten luminaire, offers space-saving economical lighting solutions with a high level of lighting comfort. Thanks to a dimmable ECG with a 1–10 V interface, the light can be adjusted to any level from 1 to 100 percent depending on need, mood or available daylight. Constant lighting control can be provided in conjunction with appropriate sensors, leading to energy savings of up to 70%.

## High-intensity FH® lamps for maximum economy

OSRAM ECOPACK®-FH DIM 14, 21, 28 und 35 W models are equipped with innovative FH® fluorescent lamps from OSRAM.

Compared with batten luminaires of the same length with T8 fluorescent lamps, they provide the same amount of light but consume less power. Fewer watts are therefore needed for the same number of "light metres".

## Highly versatile

OSRAM ECOPACK®-FH DIM for fixed connection are ideal wherever individually controllable, economical and compact light is needed with maximum


luminous efficacy, for example in offices, shops, conference and presentation rooms. A prismatic lamp cover ensures uniform distribution of light and protects the lamp.

## Major benefits at a glance

- Compact electronic T5 batten luminaire for fixed connection
- Available in 14, 21, 28 and 35 W models
- Equipped with innovative FH® fluorescent lamps
- Infinitely dimmable from 1 to 100 percent
- Constant lighting control possible
- Prismatic lamp cover

electronic *comfort light* QUICK-START Flicker-free Energy-saving Longer lamp life

## Technical data

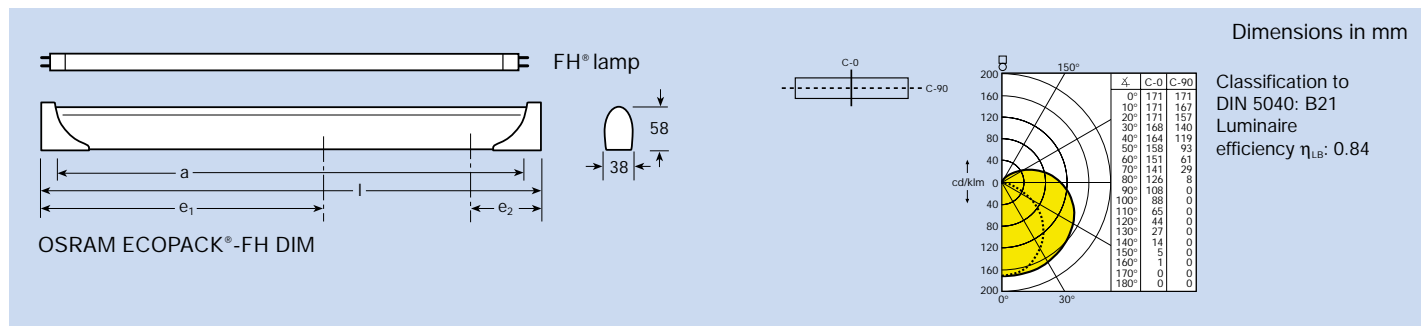

OSRAM ECOPACK®	-FH DIM 14 W	-FH DIM 21 W	-FH DIM 28 W	-FH DIM 35 W
Product reference	72611	72612	72613	72614
Product number (EAN)	4050300 659213	4050300 659237	4050300 659251	4050300 659275
Mains voltage/frequency	230-240 V/0, 50-60 Hz	230-240 V/0, 50-60 Hz	230-240 V/0, 50-60 Hz	230-240 V/0, 50-60 Hz
Control	1-10 V	1-10 V	1-10 V	1-10 V
Lamp wattage	14 W	21 W	28 W	35 W
Length l	584 mm	884 mm	1184 mm	1484 mm
Distance between mounting holes a	538 mm	838 mm	1138 mm	1438 mm
Feed e1	–	478	592	742
Feed e2	106	106	106	106
Standard pack	2 pcs	2 pcs	2 pcs	2 pcs
Equipped with lamp	FH 14W/830	FH 21W/830	FH 28W/830	FH 35W/830
Type of protection	IP20	IP20	IP20	IP20
Approval marks				

member of **voltimum**.com

SEE THE WORLD IN A NEW LIGHT

