

# TYREinflate 1000



## Rapid Inflation Time

Inflate the tire to the desired pressure in ca. 2 minutes\*\*



## Wind-up Cable

Winding/unwinding mechanism for a neatly rolled up cable



## LED Light

Easy to operate even in darkness and in low light conditions



## Rapid tyre inflator with wind-up cable

The OSRAM Tyreinflate 1000 is a rapid digital tyre inflator with a backlit digital display for easy, accurate pressure readings. Includes an auto stop feature to get the exact desired pressure needed to accurately inflate your tyres. The auto set on the Tyreinflate 1000 is incredibly easy to set up - just turn the dial to the pressure you require, click to set, then press start. The inflator will automatically stop once the correct pressure has been reached. A wind-up power cable eliminates messy wires and a 2 minute inflation time\* gets you on the road and where you need to be quickly. The power cable is long enough (3.5 m) to reach all tyres around your vehicle. The large on/off button and the LED directional light make the Tyreinflate 1000 easy to use in darkness and emergencies – keeping you prepared for whatever may happen on the road. Includes 3-piece adaptor for bicycles, balls and other inflatables.\*\*based on inflating a 13" tyre from flat to 2.41 BAR

Technical data


Product information

|                   |               |
|-------------------|---------------|
| Order reference   | OTI1000       |
| Inflation time    | 2 min         |
| Max Pressure      | 5.5 bar       |
| Air Hose Length   | 70 cm         |
| Power Cord Length | 3.5 m         |
| Charge Time (h)   | N/A           |
| Display Size      | 76 x 48 mm    |
| Measuring Units   | PSI, kPa, bar |
| Accuracy (bar)    | ±0.1 bar      |
| Flow rate (l/min) | tbc           |

Electrical data

|                   |                 |
|-------------------|-----------------|
| Nominal wattage   | 18000 W         |
| Nominal voltage   | 111 V           |
| Operating Voltage | 12 V            |
| Power Source      | 12 V Fused Plug |

Dimensions & weight

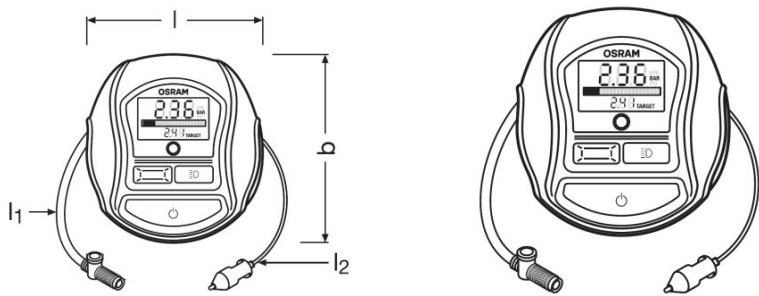

|        |         |
|--------|---------|
| Length | 2000 mm |
| Width  | 880 mm  |
| Height | 2190 mm |

Additional product data

|                         |   |
|-------------------------|---|
| Display Type            | Digital                                 |
| Noise Level (dB)        | 90 dB                                   |
| Recommended to Use With | Car, Small Van, 4X4, Large Van, Trailer |

Capabilities

|             |  |
|-------------|--|
| Accessories | Adaptors for: Balls, Air Mattress, Bikes |
| Fuse        | 15 A                                     |

Country specific categorizations

|                 |         |
|-----------------|---------|
| Order reference | OTI1000 |
|-----------------|---------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |  |
|---|--|
| Date of Declaration   | 07-03-2024   |
| Primary Article Identifier  | 4052899620223  |
| Candidate List Substance 1  | Lead   |
| CAS No. of substance 1  | 7439-92-1  |
| Safe Use Instruction  | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration No. in SCIP database                                      | b0abf529-311b-4f43-8c8e-139c08188c8b   |



Detail



Detail



Detail

Product datasheet



Detail



Detail



Detail



Detail



Product Info Graphics



Product Info Graphics

Logistical Data








| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume                | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4052899620223 | TYRE inflate 1000   | Folding carton box<br>1         | 232 mm x 95 mm x<br>216 mm              | 4.76 dm <sup>3</sup>  | 1626.00 g    |
| 4062172166539 | TYRE inflate 1000   | Shipping carton box<br>4        | 401 mm x 251 mm x<br>248 mm             | 24.96 dm <sup>3</sup> | 6893.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File |
|------|
|------|

Product datasheet

|   |  |
|---|--|
|  | User instruction<br>TYREinflate 1000   |
|  | User instruction<br>TYREinflate 1000   |
|  | Movie application<br>OSRAM TYREinflate 1000 Application Video Short (EN)                                     |
|  | Product movie<br>TyreInflate How to Video (EN)   |
|  | Product movie<br>TyreInflate 1000 Product Video (EN)   |
|  | Video<br>OSRAM TYREinflate 1000: Rapid tyre inflator with wind-up cable, large digital display and LED light |
|  | Video<br>OSRAM TYREinflate How To: Change your vehicle's tyre pressure easily                                |

Safety advice

Product won't exceed noise levels of more than 90 dB

Legal advice

CE and EAC compliant

\* for precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

\*\* based on inflating a 13" tyre from flat to 2.41 BAR

Application advice:

For more detailed application information and graphics please see product datasheet.

Disclaimer:

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

