


LEDinspect RECHARGEABLE UNDERBONNET LIGHT



Rechargeable

Up to 4.5h operating time.
Rechargeable via USB-C port
with a charging time of only
approx. 3 hours

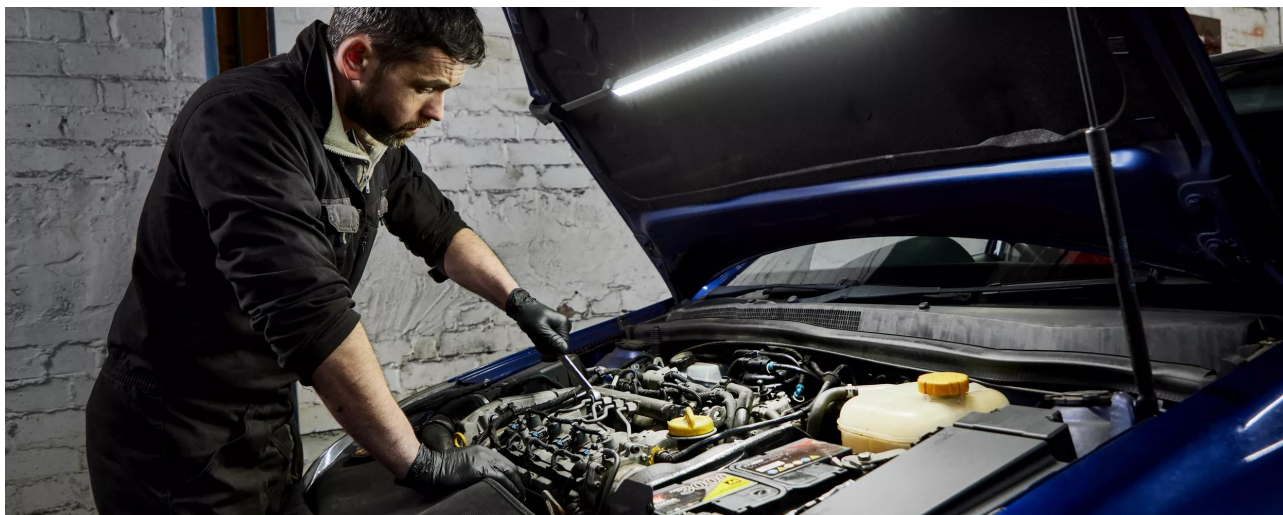


Up to 1200lm (high) & 600lm (low)

Two light functions: Up to
1200lm (high) & 600lm (low)



Extendable

Extendable up to 1.8m. Fits
almost every underbonnet.



2-year OSRAM Guarantee*

Systematic quality assurance
measures underpin the
premium workmanship and
functionality of our products.
Innovative technology and
excellent quality really pay
dividends for our customers.

Light is versatile

This rechargeable underbonnet light from OSRAM is perfect for professional and private use. With two light functions up to 1200lm (high), 600lm (low) and a light bar that can be rotated up to 360°, this lighting fixture offers different adjustment options for a variety of tasks. The LEDinspect Rechargeable Underbonnet Light is particularly impressive with its great flexibility - it can be extended to a length of up to 1.80m and can therefore provide optimum lighting in the engine compartment in a wide range of vehicles. The rechargeable battery allows up to 2h operating time at high power or up to 4.5h at low power and with a charging time

Product datasheet



of only approx. 3 hours, this OSRAM lamp is also quickly ready for use again. A USB-C charging cable with 1.2m length for charging the lithium battery is included. In accordance with protection class IP65, this lamp has protection against the ingress of dust particles and against splashing water and is tested for impact resistance in accordance with IK07. With a weight of only 840g and soft pads at both ends of the mounting bar, this light bar is designed not to cause damage to the bonnet when used as instructed and is therefore ideal in professional workshops to be mounted on the bonnets of a wide range of vehicles from small to large. OSRAM also provides a 2-year guarantee*

*For precise conditions please refer to:
www.osram.com/am-guarantee

Technical data

Product information

| | |
|---|-----------------------|
| Application (Category and Product specific) | LED inspection lights |
|---|-----------------------|

General Product Information

| | |
|------------------------|----------|
| Global order reference | LEDIL415 |
|------------------------|----------|

Electrical Data

| | |
|-----------------|-------|
| Nominal wattage | 16 W |
| Nominal voltage | 3.7 V |

Photometric Data

| | |
|-----------------------|---------|
| Color temperature | 6500 K |
| Nominal luminous flux | 1200 lm |
| Light color LED | White |

Physical Attributes & Dimensions



| | |
|----------------|----------|
| Product weight | 840.00 g |
| Length | 1153 mm |
| Width | 80.0 mm |
| Height | 67 mm |

LED module information

| | |
|---------------------------|----|
| Number of LEDs per module | 32 |
|---------------------------|----|

Colors & materials

| | |
|------------|----------------|
| Base color | Black / Orange |
|------------|----------------|

Lifetime Data

| | |
|-----------|---------|
| Guarantee | 2 years |
|-----------|---------|

Additional product data

| | |
|------------------------------|---|
| Type of Battery | Rechargeable |
| Number of included batteries | 1 |
| Scope of battery | Yes |
| Battery | High-quality lithium-ion battery 3.7V 4400mAh |

Capabilities

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Certificates & standards

| | |
|-----------|-------------------------------|
| Standards | CE / EMC / MSDS / ROHS / UKCA |
| IK Class | IK07 |

Logistical data

| | |
|-----------------------|-------|
| Watt hour per battery | 16.28 |
|-----------------------|-------|

Environmental & Regulatory Information



| | |
|---|--|
| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
| Candidate list substance 1 | Lead |
| CAS No. of substance 1 | 7439-92-1 |
| Safe use instruction | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration no. in SCIP database | 1f064e13-454b-4c4f-a3e5-26f8d1388215 |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4052899631021 | INSPECTION LAMP | Folding carton box 1 | 105 mm x 75 mm x 1175 mm | 9.25 dm ³ | 1256.00 g |
| 4052899631038 | INSPECTION LAMP | Shipping carton box 4 | 1195 mm x 230 mm x 180 mm | 49.47 dm ³ | 5744.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File | |
|---|--|
|  | User instruction LEDinspect RECHARGEABLE UNDERBONNET LIGHT LEDIL415 |
|  | User instruction GPRS_Safety symbols instructions |

Legal advice

Application advice:For more detailed application information and graphics please see product datasheet and the user instruction.*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

