

TYREinflate 6000

TYREinflate 6000 OTIR 6000



Rapid Inflation Time

Inflate the tyre to the desired pressure in approximately 2 minutes 1)2)



Deflator Valve

For deflating too much air



Digital Auto Stop

Automatic stop function when the preset pressure is reached



Cordless and rechargeable

Can be used with or without direct power supply



Rechargeable Digital Tyre Inflator and Air Pump

The OSRAM TYREinflate 6000 is a cordless and rechargeable tyre inflator with Li-Ion battery, making it an ideal companion for camping and road trips. The OTIR 6000 digital tyre inflator can inflate a tyre in just two minutes¹⁾²⁾ and has a special setting for other inflatable items such as air beds, air mattresses, balls and more. The auto stop function and the deflator valve help to keep the tyres and other inflatables optimally inflated. . The backlit LED display and integrated LED light provide improved readability of the pressure settings and improved illumination of the working area even in reduced visibility conditions or at night. Thanks to the powerbank function, the OSRAM TYREinflate 6000 can also be used as a charger for electronic devices such as your mobile phone. The scope of delivery includes a mains charger and a 12-volt cable for direct power supply, if required. Also included is a 10-piece adapter set, a storage bag and spare valve caps. OSRAM offers a 2-year guarantee¹⁾ on this product.

1) For precise conditions please refer to: www.osram.com/am-guarantee

2) Based on inflating a 13" tyre from flat to 2.4 BAR

3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

Technical data


Product information

| | |
|-------------------|---------------|
| Order reference | OTIR6000 |
| Inflation time | 2 min |
| Max Pressure | 5.5 bar |
| Air Hose Length | 70 cm |
| Deflation valve | Yes |
| Power Cord Length | 3.5 m |
| Charge Time (h) | 10 h |
| LED Light | Yes |
| Display Size | 76 x 46 mm |
| Measuring Units | PSI, kPa, bar |
| Preset Function | Yes |
| Auto stop | Yes |
| Storage Case | Yes |
| Accuracy (bar) | ±0.1 bar |
| Flow rate (l/min) | 43-45 l/min |

Electrical data

| | |
|-----------------|----------------------------------|
| Nominal wattage | 180.00 W |
| Nominal voltage | 12.0 V |
| Power Source | 12 V Fused Plug/230 V mains plug |

Dimensions & weight

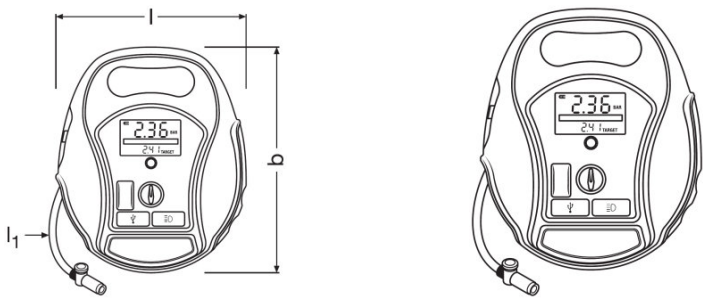

| | |
|--------|----------|
| Length | 298.0 mm |
| Width | 298.0 mm |
| Height | 80.0 mm |

Additional product data

| | |
|-------------------------------------|--|
| Display Type | Digital |
| Noise Level (dB) | 90 dB |
| USB Socket 2.1A (For other Devices) | Yes |
| Recommended to Use With | Motorbike, Bicycle, Small Van, Motorhome, Air beds, air mattress |
| Extras | 10-piece adaptor kit & 4 x spare valve caps, 1 x spare fuse & 1 pair of gloves |

Capabilities

| | |
|-------------|--|
| Accessories | Adaptors for: Balls, Air Mattress, Bikes |
| Fuse | 15 A |

Country specific categorizations

| | |
|-----------------|----------|
| Order reference | OTIR6000 |
|-----------------|----------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|--|
| Date of Declaration | 07-03-2024 |
| Primary Article Identifier | 4062172294515 |
| Candidate List Substance 1 | Lead |
| CAS No. of substance 1 | 7439-92-1 |
| Safe Use Instruction | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration No. in SCIP database | 3abae9a3-29bd-403e-915c-caab5002583a |



Detail



Detail



Detail

Product datasheet



Detail



Detail



Detail



Detail



Detail



Detail



Detail


Logistical Data

Product datasheet

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4062172294515 | TYRE inflate 6000 | Folding carton box 1 | 325 mm x 100 mm x 283 mm | 9.20 dm ³ | 1545.00 g |
| 4062172294522 | TYRE inflate 6000 | Shipping carton box 4 | 420 mm x 344 mm x 311 mm | 44.93 dm ³ | 6480.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File | |
|---|--|
|  | User instruction TYREinflate OTIR6000 Rechargeable Digital Tyre Inflator and Air Pump |

Legal advice

-
- 1) For precise conditions please refer to: www.osram.com/am-guarantee

2) Based on inflating a 13" tyre from flat to 2.41 BAR

3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

Application advice:For more detailed application information and graphics please see product datasheet and the user instruction.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

