

NIGHT BREAKER H1-LED

OSRAM's first NIGHT BREAKER H1 LED



Street-Legal¹⁾

The NIGHT BREAKER LED family - OSRAM's first street-legal¹⁾ LED retrofit lamps.



6000K & Cool White

See and be seen with OSRAM. Cool white color temperature similar to daylight. For more safety on the road, especially when driving at night



Up to 5 times longer lifetime³⁾

Vibration resistant, environmentally friendly, and cost-efficient



4 year OSRAM guarantee

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

With the NIGHT BREAKER H1 LED OSRAM's first street legal¹⁾ H1-LED replacement lamp is now on the market

With the street-legal¹⁾ NIGHT BREAKER H1-LED you can now upgrade the function of your high- and low beam lights of your vehicle to state-of-the-art LED technology. These LED replacement lamps are suitable as a replacement for conventional H1 lamps and bases. They offer a modern and bright white light with a color temperature of up to 6000 Kelvin and impress with reduced glare for other road users that is up to 40% lower as the permissible maximum values²⁾. In comparison to standard lamps, such as halogen lamps, these LED retrofit lamps consume up to 55% less energy and convince thanks to the LED technology and the specially developed vibration-resistant design, with up to 5 times longer life time³⁾. You can now replace your vehicle lamps with OSRAM's revolutionary NIGHT BREAKER LED retrofit lamps and experience trend-setting brightness with road approval¹⁾ Additionally, OSRAM offers a dedicated guarantee on all NIGHT BREAKER LED retrofit lamps²⁾



Technical data

Product information

Order reference	64150DWNB
Application (Category and Product specific)	High and low beam
Product legal advice 1	1)Approved LED light source - only applies to the respective countries in which there is approval or to which an equivalent approval applies and the vehicle models and light functions currently listed in the compatibility list. For more details see www.osram.com/nb-led
Product legal advice 2	2) In comparison to the minimum requirements of ECE R112, while the glare is below the maximum permissible values by up to 40%
Product legal advice 3	3) compared to halogen lamps


Electrical data

Power input	16.0 W
Power input tolerance	±15 %
Nominal wattage	16.00 W
Nominal voltage	12.0 V

Photometrical data

Color temperature	6000 K
Luminous flux	1550 lm
Luminous flux tolerance	±15 %
Light color LED	Cool white

Dimensions & weight

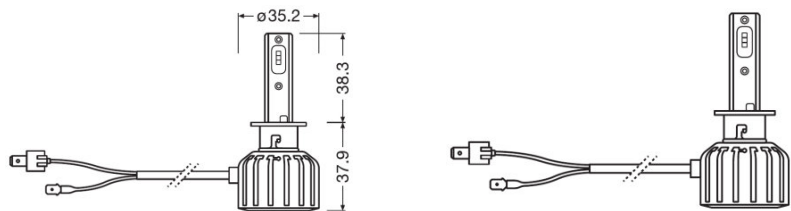

Product weight	50.00 g
Length	76.2 mm

Product datasheet

Diameter	11.8 mm
----------	---------

Lifespan

Lifespan Tc	2500 h
Lifespan B3	1500 h

Additional product data

Base (standard designation)	P14.5s
-----------------------------	--------

Capabilities

Technology	LED
------------	-----

Certificates & standards

Standards	ABG
-----------	-----

Country specific categorizations

Order reference	64150DWNB
-----------------	-----------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (RECh)	
Date of Declaration	05-03-2024
Primary Article Identifier	4062172373791
Declaration No. in SCIP database	In work

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172373791	NIGHT BREAKER H1 LED	HFB 2	140 mm x 129 mm x 62 mm	1.11 dm³	227.00 g
4062172373807	NIGHT BREAKER H1 LED	Shipping carton box 4	150 mm x 132 mm x 142 mm	2.81 dm³	532.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File

Product datasheet



User instruction
NIGHT BREAKER LED H1 64150DWNB



Brochures
LEDriving Retrofits - Exchange overview (EN)

Safety advice

Application advice: For more detailed application information and graphics please see product datasheet and user manual.

Legal advice

1) Approved LED light source - only applies to the respective countries in which there is approval or to which an equivalent approval applies and the vehicle models and light functions currently listed in the compatibility list. For more details see www.osram.com/nb-led

2) Compared to the minimum requirements of ECE R112, while the glare is below the maximum permissible values by up to 40%

3) In comparison to traditional Halogen lamps

4) For precise conditions please refer to: www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



OSRAM