


TP22H44IN16GAUL5359 100/CS 20/SKU

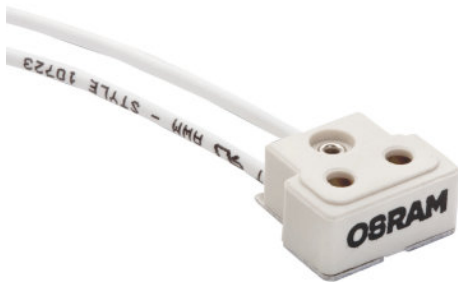

Product features and benefits

- Ceramic housings designed specifically for high temperature halogen and metal halide applications
- High quality contact materials for optimal mechanical and electrical properties
- UL recognized and CE certified

Areas of application

- Halogen Fixtures
- Metal Halide Fixtures
- Halogen Instrumentation
- Halogen Equipment

Product datasheet

Technical data

General product information

Product Number	69818
Product Name	TP22H44IN16GAUL5359 100/CS 20/SKU
CSA File No.	LR20904
Old Part Number	F511950

Electrical data

Maximum Wattage (W)	1000 W
Maximum Voltage (V)	250 V

Physical attributes

Length (in)	0.75 in
Length (mm)	19 mm
Width (in)	0.85 in
Width (mm)	21.7 mm
Height (in)	0.43 in
Height (mm)	10.8 mm
Body Material	Ceramic Steatite
Contact Material	Silver Plated Nickel
Wire Type	UL 5359
Wire Gauge (AWG)	16 AWG
Wire Color(s)	White
Lead Length (in)	44.2 in
Lead Length (mm)	1118 mm
Lead Strip Length (in)	0.375 in
Lead Strip Length (mm)	9 mm

Additional product data

Lamp Base Reference	G9.5, 2-Pin Medium Base
Maximum Operating Temperature (°C)	300 C
Rohs Compliant	Yes
Underwriters Laboratories File No.	E31557

Packaging Information

Product number	EAN/UPC	Packaging	Quantity	Outside dimensions l x w x h	Gross weight
69818	4052899184343	Shipping box (Case)	20	10.1 in x 7.4 in x 2.4 in	2.8 lb

Product datasheet

Product number	EAN/UPC	Packaging	Quantity	Outside dimensions L x w x h	Gross weight
----------------	---------	-----------	----------	------------------------------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

OSRAM does not accept liability for errors, changes and omissions.